

SPECIFICATIONS:

PART NUMBER:

HG2ZD2M-XX-XX

(Ex: Single Color Blue/Red: HG2ZD2M-BR-XX)

(Ex: Dual Color Blue/Red With White Flood: HG2ZD2M-BR-WW)

APPLICATION:

Exterior and Interior Use

MOUNTING:

Vehicle Specific Bracket or Universal Surface Mount

DIMENSIONS:

Length: 21.95"

Height: 0.572"

Depth: 1.461"

INPUT VOLTAGE:

9 - 15 VDC

STAND-BY CURRENT DRAW:

.001A

OPERATING TEMPERATURE:

-4° to 185° F (-20° to 85° C)

CURRENT DRAW:

1.5A Average

1A min. / 3A max. dependent on flash pattern

1A min. / 3A max. dependent on flash pattern

60 5mm High-intensity, wide-angle LEDs

FLASH PATTERNS:

20

CHASSIS:

Black Finish Powder Coated Aluminum Housing

CERTIFICATIONS:

SAE J595 Class 1, Title 13

WARRANTY:

5 Year Warranty

PROUDLY DESIGNED AND MADE IN THE USA.

BLACK (-) Chassis Ground

RED (+) 12V Constant Power

WHITE (+) Switched Power

BROWN (+) Takedown Power

GREEN (+) Cruise Mode


BLUE (+) Momentary Pattern

YELLOW (+) Right Directional


ORANGE (+) Left Directional

* Please see full wiring diagram for addition information

Universal Model

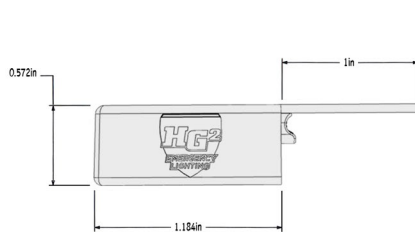

Truck Model

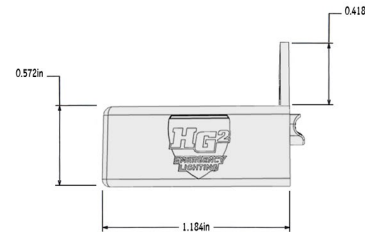

Interceptor Model

