

**SPECIFICATIONS:**

**PART NUMBER:**

HG2ZD6M-XX-XX

(Ex: Single Color Blue/Red: HG2ZD6M-BR-XX)

(Ex: Dual Color Blue/Red With White Flood: HG2ZD6M-BR-WW)

**APPLICATION:**

Exterior and Interior Use

**MOUNTING:**

Vehicle Specific Bracket or Universal Surface Mount

**DIMENSIONS:**

Length: 67.99"

Height: 0.572"

Depth: 1.461"

**INPUT VOLTAGE:**

9 - 15 VDC

**STAND-BY CURRENT DRAW:**

.001A

**OPERATING TEMPERATURE:**

-4° to 185° F (-20° to 85° C)

**CURRENT DRAW:**

1.5A Average

1A min. / 3A max. dependent on flash pattern

1A min. / 3A max. dependent on flash pattern

60 5mm High-intensity, wide-angle LEDs

**FLASH PATTERNS:**

20

**CHASSIS:**

Black Finish Powder Coated Aluminum Housing

**CERTIFICATIONS:**

SAE J595 Class 1, Title 13

**WARRANTY:**

5 Year Warranty

**PROUDLY DESIGNED AND MADE IN THE USA.**

**BLACK** (-) Chassis Ground

**RED** (+) 12V Constant Power

**WHITE** (+) Switched Power

**BROWN** (+) Takedown Power

**GREEN** (+) Cruise Mode


**BLUE** (+) Momentary Pattern

**YELLOW** (+) Right Directional


**ORANGE** (+) Left Directional

\* Please see full wiring diagram for addition information

**Universal Model**

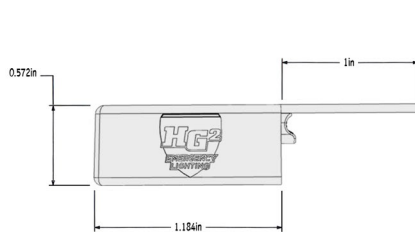

**Truck Model**

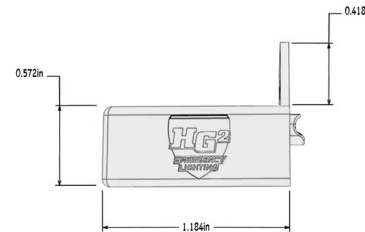

**Interceptor Model**

