

HG2 FRONT VISOR

2020+ Dodge Durango Interior Front Visor



Introduction:

- Sold as a Pair
- 3 module each, powder coated aluminum housing
- 20 Self Contained Flash Patterns
- Certification: SAE J595 Class 1
- Flood and cruise mode capabilities
- Designed, Engineered and Made in USA

CONTENTS	
QTY	COMPONENT
1	MAIN BODY
2	MOUNTING BRACKET
4	4X 10-32 X 1/2 BHCS
6	LIGHTS

WIRES

- Black (G) - Ground
- White (P) - Pattern Select
- Yellow (S) - SYNC
- Red (V) - Power
- Blue (T) - Takedown

CHANGE PATTERNS

Apply 12V to WHITE (Pattern_Sel)
for less than 5 seconds



⚠ WARNING

- Only trained technicians should perform installation. It is the installer's responsibility to identify the vehicle's wiring configuration and ensure correct system integration.
- Surface may become hot during regular use.
- Select the correct wire gauge. All power connections to the battery or chassis ground must be capable of handling 125% of maximum current load and must be fused at the power source.
- Always install grommets to protect wires passing through metal or firewall openings.
- High-current interconnects must be securely and correctly terminated. Improper crimping can lead to excessive heat and potential fire hazards. Always follow the crimp connector manufacturer's guidelines.
- Improper installation of connectors, fuses, or wiring can result in vehicle malfunction or fire.
- This system should not be used to disable headlights, brake lights, or any other safety-related equipment.



FAILURE TO FOLLOW THESE GUIDELINES
COULD CAUSE DAMAGE TO THE PRODUCT,
VEHICLE AND/OR SERIOUS PERSONAL INJURY
OR DEATH.

2020+ Dodge Durango Interior Front Visor

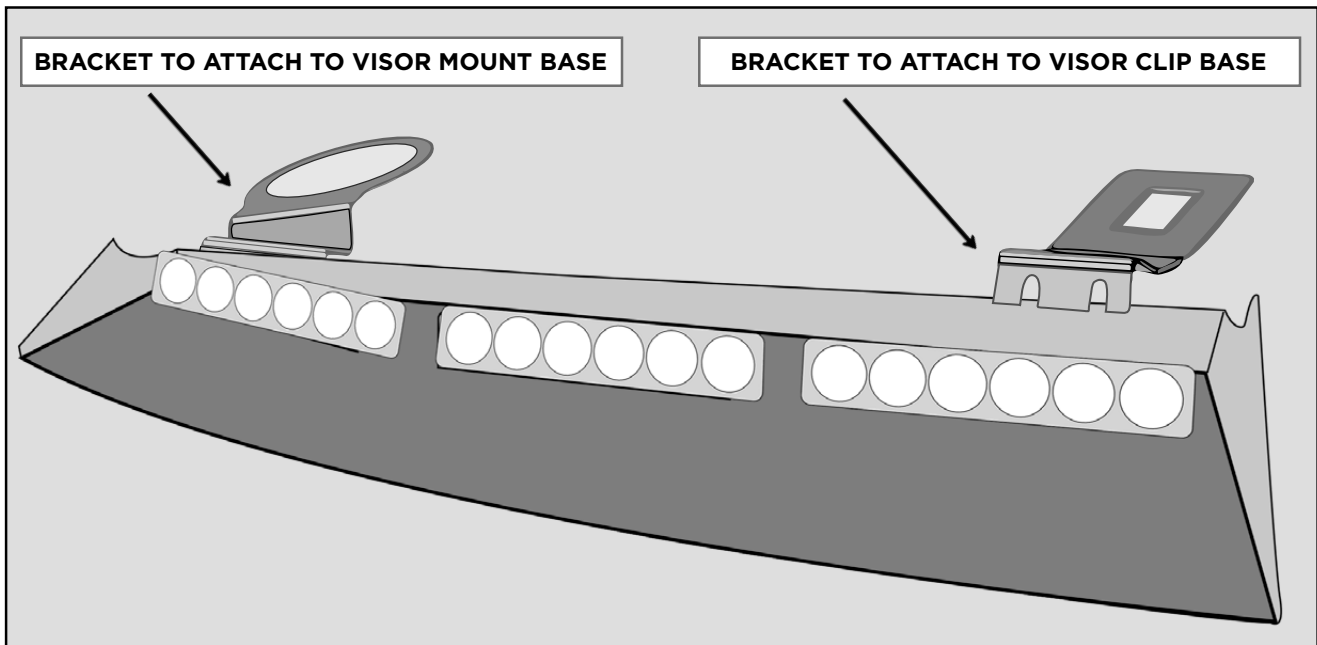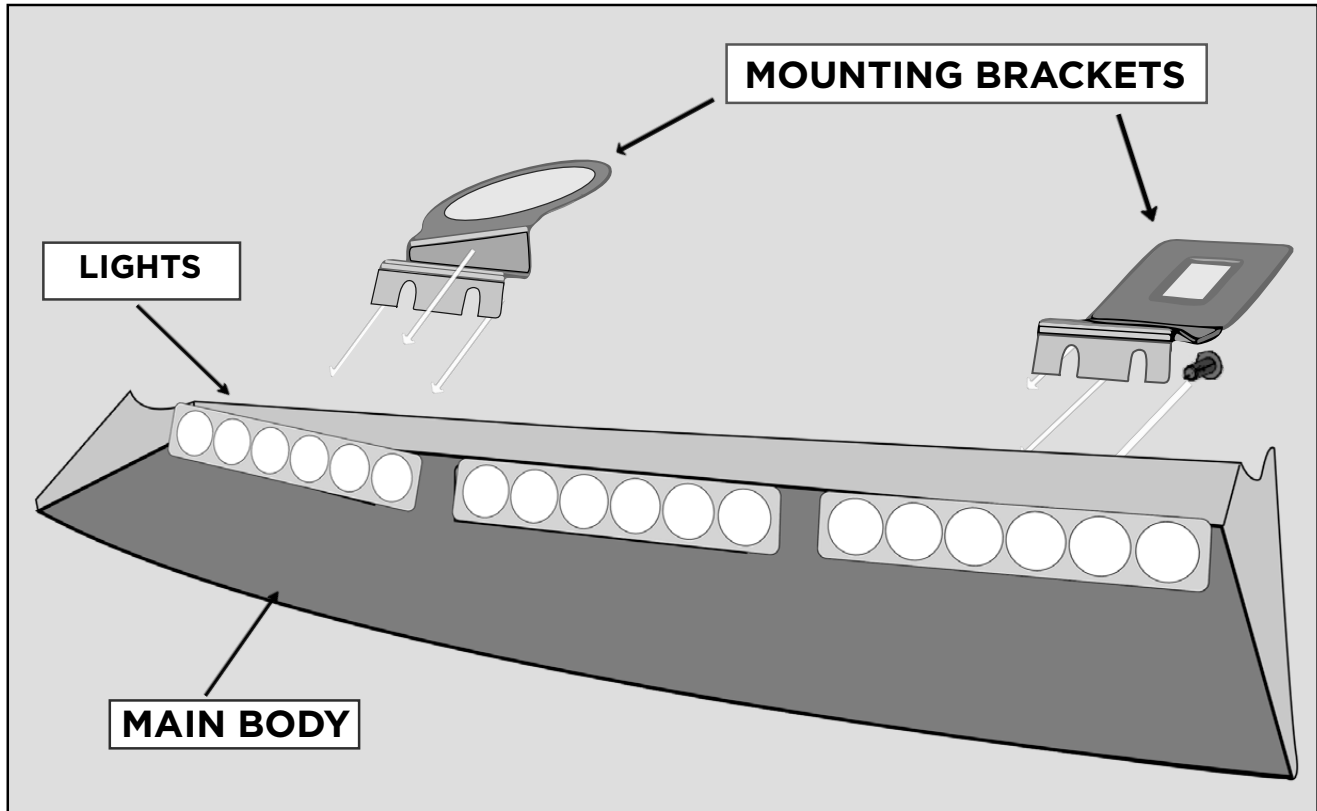

2020+ Dodge Durango Interior Front Visor

REMOVE THE VISOR AND VISOR CLIP. INSTALL THE MOUNTING BRACKETS IN THEIR PLACE, THEN REATTACH THE VISOR AND CLIP TO SECURE THE SHROUD.

